



LIVE ELECTRICAL DISTRIBUTION UK LTD
 4 Queensmead Place, Textilose Road, Manchester, M17 1PH
 Tel: 0161 8702592 Web: www.liveelectrical.co.uk
 E-mail: sales@liveelectrical.co.uk



www.liveelectrical.co.uk

www.liveelectrical.co.uk
 ✉ sales@liveelectrical.co.uk



TREASURE THE RESOURCES SUSTAINABLE USE





ABOUT US

Live Electrical Distribution (UK) Ltd was founded in November 2010. Since then we have continuously evolved and improved our product range to meet the needs of our customers. Our philosophy is simple - we offer a quality product, at a low cost, with swift delivery.

Here at Live, we believe our success is down to the way we treat our employees and customers. Every member of our team plays a vital part in the operation and every customer is valued as much as the next. We always aim to provide the highest level of customer service, from the moment we receive your enquiry until after you've received your order. This attitude has helped us develop and maintain our customer base year on year, since the day we opened our doors.






www.liveelectrical.co.uk
✉ sales@liveelectrical.co.uk

Contents

01	SOLAR CONSUMER UNIT
03	DC MINIATURE CIRCUIT BREAKERS
05	DC SURGE PROTECTION DEVICE
09	PHOTOVOLTAIC FUSE HOLDER
13	PHOTOVOLTAIC FUSE
15	PHOTOVOLTAIC DC SWITCH
17	PHOTOVOLTAIC GLAND CONNECTOR
19	PHOTOVOLTAIC CABLE CONNECTOR
21	FUSE CONNECTOR
23	TYPE -T BRANCH CONNECTOR
29	TYPE -Y PHOTOVOLTAIC BRANCH CONNECTOR
35	SOLAR DC CONNECTOR SPANNERS
37	DIODE CONNECTOR
39	HIGH SPEED FUSE

SOLAR CONSUMER UNIT

IP65 design,waterproof,anti dust and anti ultraviolet.
Strict test for high and low temperature,used widely .
Flexible connection and simple installation.
The simplified system wiring.

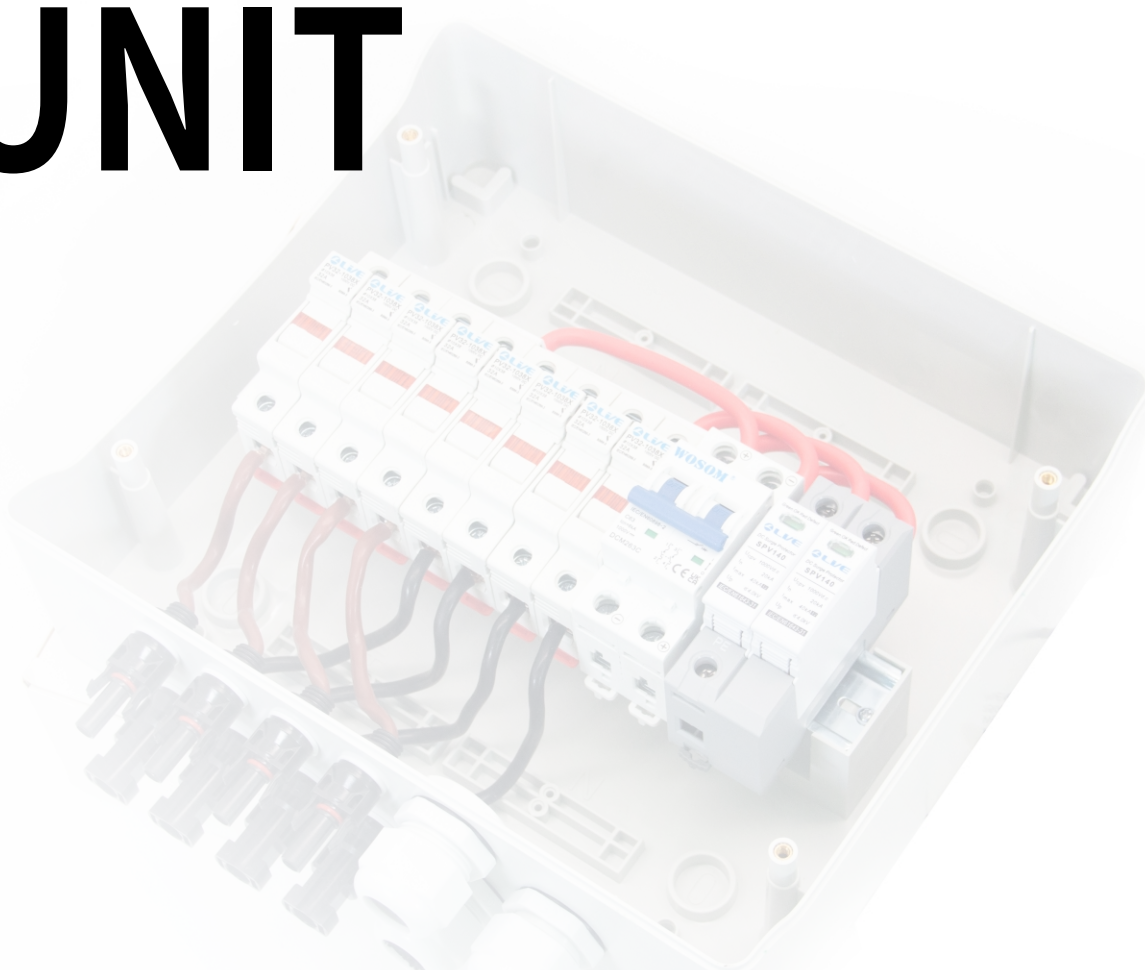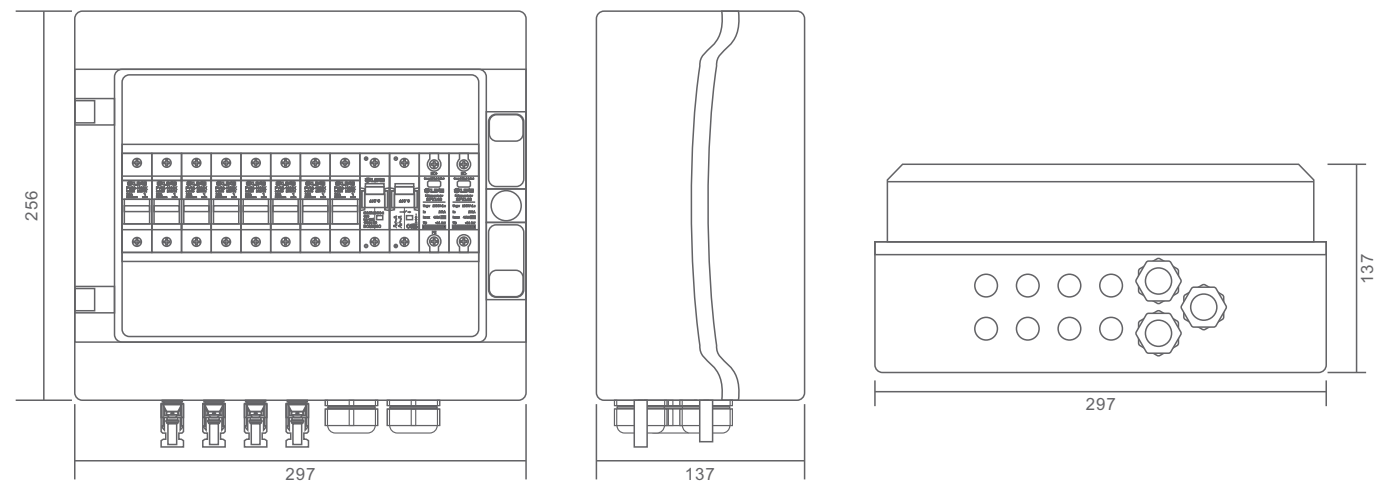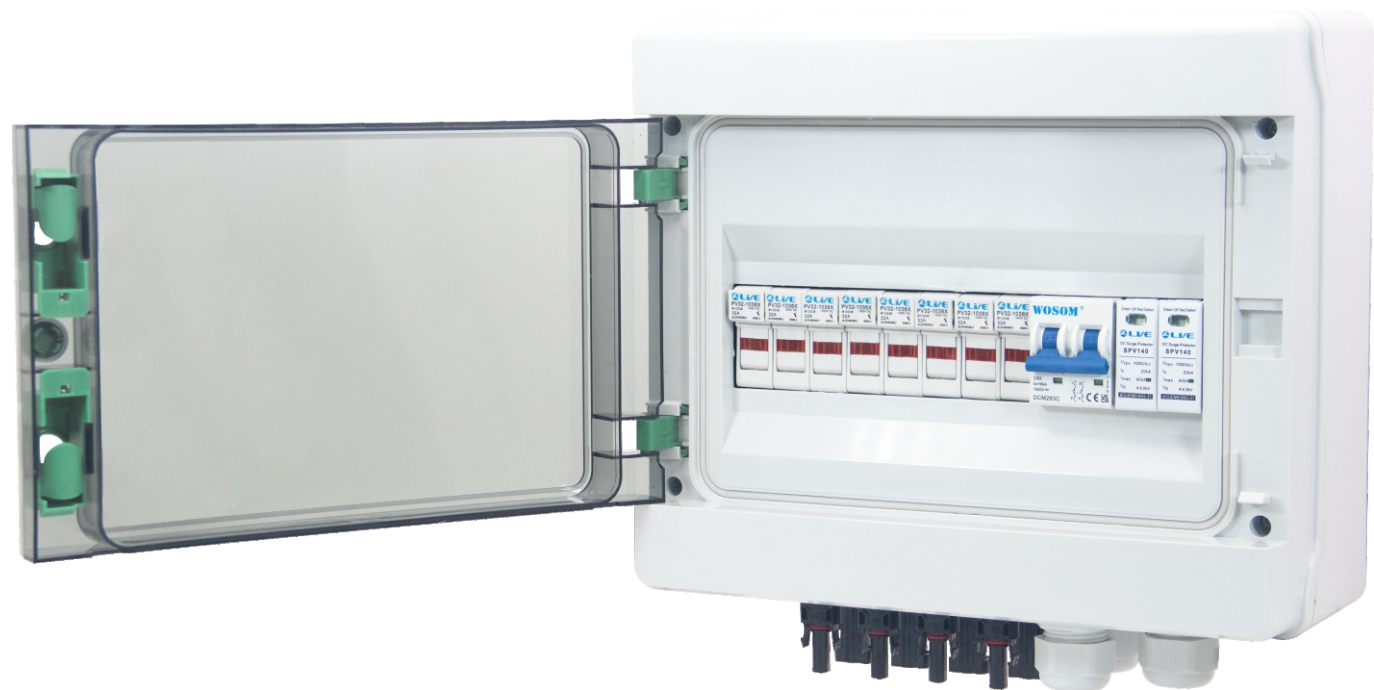


FUNCTION

- DC Fuse Both Protection Of Positive And Negative Poles
- DC Circuit Breaker For Isolating Circuits And Maintenance
- DC 1000V Surge Protector
- Method A: Solar Connector Wiring (Replaceable + and -)
- Method B: Direct Wiring With Fuse



CONFIGURATION LIST

- Fitted with 10x38 15A Photovoltaic Fuse
- Fitted with 32A 1000VDC Photovoltaic Fuse Holder with light
- Fitted with 2P 63A DC1000V Circuit Breaker
- Fitted with 2P/20-40KA DC 1000V Surge Protector
- Fitted with 1000VDC Photovoltaic Gland Connector

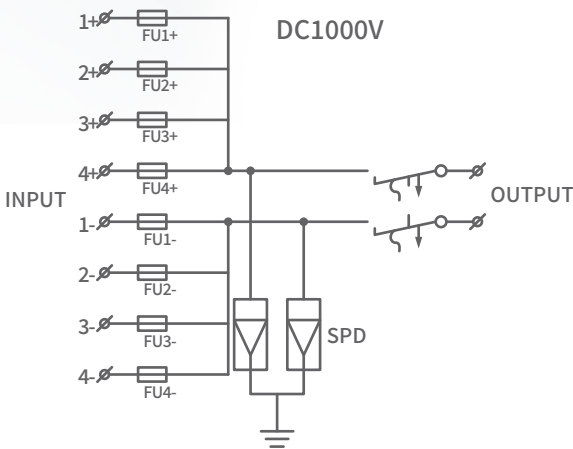

Part No.	Description	Box Qty
ENC12-PV4/1	12 way solar consumer unit DC1000V ,4 input 1 output	4

DC MINIATURE CIRCUIT BREAKERS

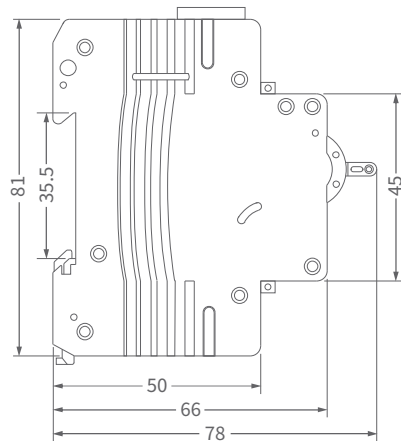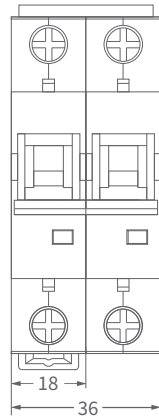

2POLE 6KA DC MINIATURE CIRCUIT BREAKERS

TECHNICAL DATA



- Rated current In (A) :6,10,16,20,25,32,40,50,63
- Rated voltage Ue(DC): 600V(2P)
- Rated breaking capacity(A): 6kA
- Thermo-magnetic release characteristic: C
- Contact position degree: IP20
- IEC/EN60898-2

Part No.	Description	Box Qty
DCM206C	2Pole 6Amps C Curve 6kA DC MCB	60
DCM210C	2Pole 10Amps C Curve 6kA DC MCB	60
DCM216C	2Pole 16Amps C Curve 6kA DC MCB	60
DCM220C	2Pole 20Amps C Curve 6kA DC MCB	60
DCM225C	2Pole 25Amps C Curve 6kA DC MCB	60
DCM232C	2Pole 32Amps C Curve 6kA DC MCB	60
DCM240C	2Pole 40Amps C Curve 6kA DC MCB	60
DCM250C	2Pole 50Amps C Curve 6kA DC MCB	60
DCM263C	2Pole 63Amps C Curve 6kA DC MCB	60

DC SURGE PROTECTION DEVICE

Developed in line with recent advancements, the DC SPD 1000V series of surge arresters are designed to have a continuous maximum operating voltage of 1000V. The surge arresters are packed with high-pressure sensors to detect failures and are made from high-quality materials that prevent damage from weather. They comply with BS EN61643-31

- Type 1+2 DC SPD solar photovoltaic application
- IEC /EN61643-31
- Thermal disconnect for fault indication
- Plug-in Protection Module, Easily Installation and Maintenance
- High Energy Varistor, Response Time Less Than 25Nanosecond
- Optional Remote Signalling

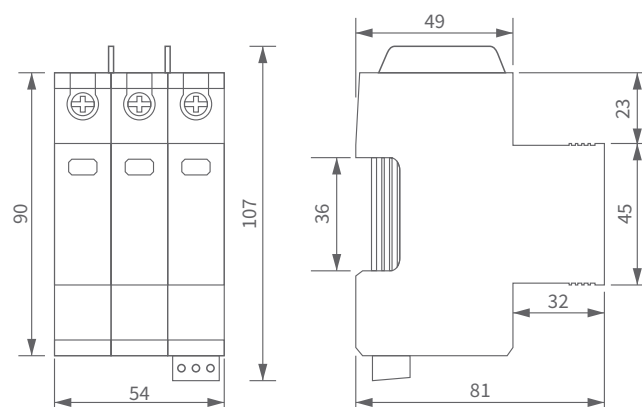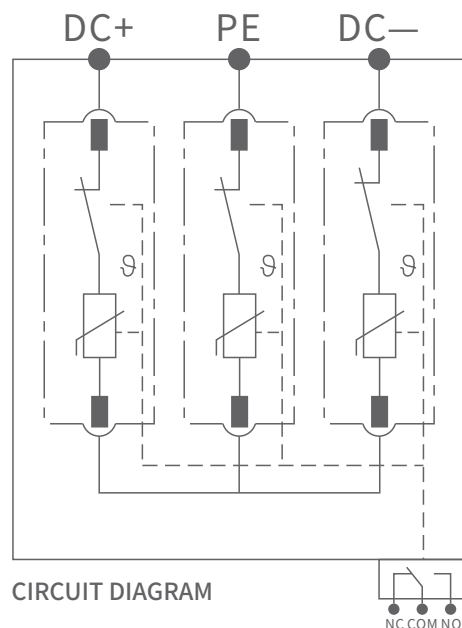

TYPE 1+2 DC SURGE PROTECTION DEVICE

TECHNICAL DATA





- Open Voltage ($U_{oc\ Max}$) : 600VDC, 1000VDC, 1500VDC
- Type : Type1+2
- Lightning pulse current (I_{imp}) : 12.5kA
- Max Continuous Operational Voltage (U_c) : 1300VDC
- Nominal discharge current (I_n) : 20kA
- Maximum discharge current (I_{max}) : 40kA
- Voltage protection level (U_p) : $\leq 4.0kV$
- Protection degree : IP20
- Ambient Temperature : $-40^{\circ}C \sim +80^{\circ}C$
- Number of Poles : 2Poles, 3Poles

Part No.	Description	Box Qty
SPV340T	3Pole 20KA/40KA Type1 DC Surge Protection Device Up To 1000V	32

DC SURGE PROTECTION DEVICE

Developed in line with recent advancements, the DC SPD 1000V series of surge arresters are designed to have a continuous maximum operating voltage of 1000V. The surge arresters are packed with high-pressure sensors to detect failures and are made from high-quality materials that prevent damage from weather. They comply with BS EN61643-31

- Type 2 DC SPD solar photovoltaic application
- According to IEC /EN61643-31
- Thermal disconnect for fault indication
- Plug-in Protection Module, Easily Installation and Maintainance
- High Energy Varistor, Response Time Less Than 25Nanosecond
- Optional Remote Signalling

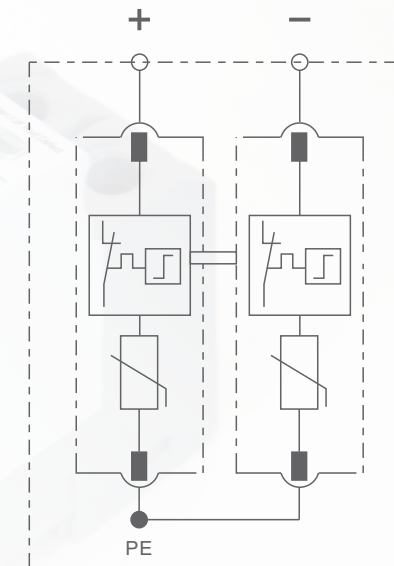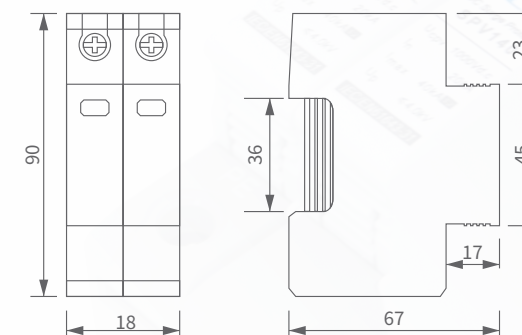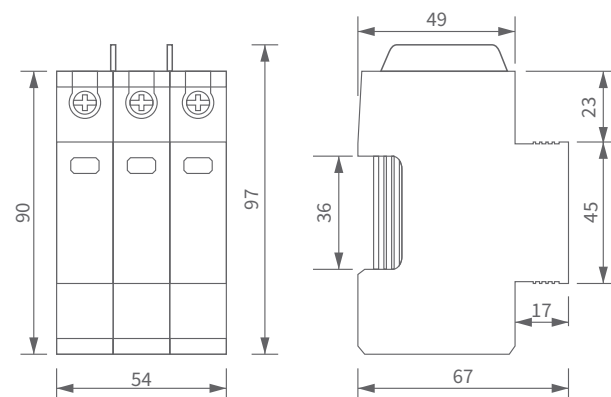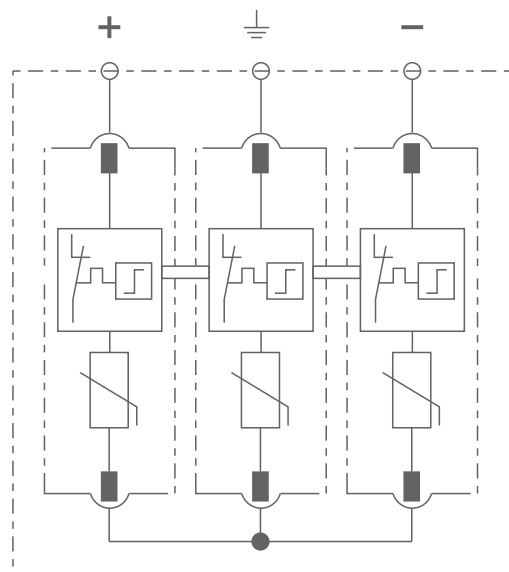

TYPE 2 DC SURGE PROTECTION DEVICE

TECHNICAL DATA

- Open Voltage (Uoc Max) : 600VDC,1000VDC,1500VDC
- Type : Type2
- Max Continuous Operational Voltage (Uc) : 1300VDC
- Nominal discharge current (In) : 20kA
- Maximum discharge current(Imax) : 40kA
- Voltage protection level (Up) : ≤4.0kV
- Protection degree : IP20
- Ambient Temperature : -40°C~+80°C
- Number of Poles : 2Poles,3Poles

Part No.	Description	Box Qty
SPV240	2Pole 20KA/40KA Type2 DC Surge Protection Device Up To 1000V	48
SPV340	3Pole 20KA/40KA Type2 DC Surge Protection Device Up To 1000V	24
SPV240/600V	2Pole 20KA/40KA Type DC Surge Protection Device UP To 600V	48
SPV340/1500V	3Pole 20KA/40KA Type DC Surge Protection Device UP To 1500V	24

PHOTOVOLTAIC FUSE HOLDER




TECHNICAL DATA

- Rated Voltage : DC1000V
- Rated Current : 32A
- Standard : IEC/EN60269-3,BS88-3

Part No.	Description	Fuse Size	Max Rated Current	Function Class
PV32-1038X	32A 1000VDC Photovoltaic Fuse Holder with light Without Fuse	10X38	32A	gPV

PHOTOVOLTAIC FUSE HOLDER

The Photovoltaic Fuse Holder is used in the photovoltaic combiner box to provide safe and reliable protection for overload and short-circuit current faults of PV modules and PV arrays.

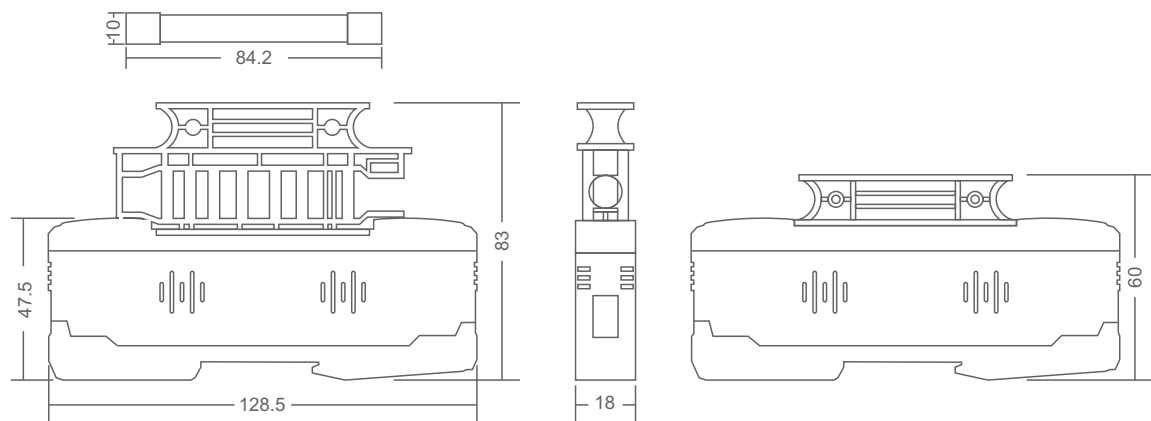


TECHNICAL DATA

- Rated Voltage : DC1500V
- Rated Current : 32A
- Standard : IEC/EN60269-3,BS88-3

Part No.	Description	Fuse Size	Max Rated Current	Function Class
PV32-1085	32A 1500VDC Photovoltaic Fuse Holder Without Fuse	10X85	32A	gPV

PHOTOVOLTAIC FUSE

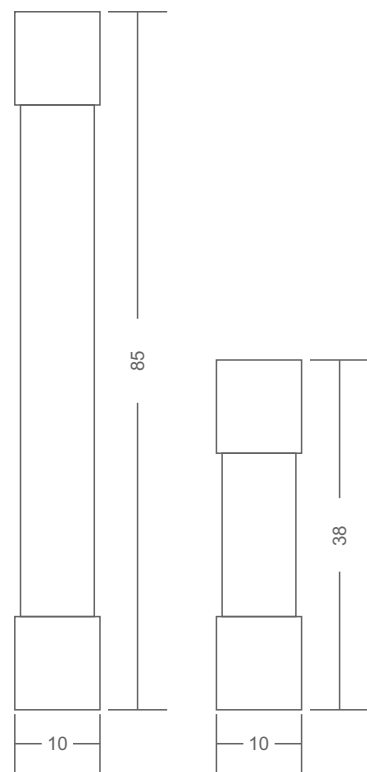

10X38 1000VDC PHOTOVOLTAIC FUSE


Part No.	Description	Function Class	Breaking Capacity (kA)
PV-FU2A10	2A 10x38 1000VDC Photovoltaic Fuse	gPV	20
PV-FU4A10	4A 10x38 1000VDC Photovoltaic Fuse	gPV	20
PV-FU6A10	6A 10x38 1000VDC Photovoltaic Fuse	gPV	20
PV-FU8A10	8A 10x38 1000VDC Photovoltaic Fuse	gPV	20
PV-FU10A10	10A 10x38 1000VDC Photovoltaic Fuse	gPV	20
PV-FU12A10	12A 10x38 1000VDC Photovoltaic Fuse	gPV	20
PV-FU15A10	15A 10x38 1000VDC Photovoltaic Fuse	gPV	20
PV-FU16A10	16A 10x38 1000VDC Photovoltaic Fuse	gPV	20
PV-FU20A10	20A 10x38 1000VDC Photovoltaic Fuse	gPV	20
PV-FU25A10	25A 10x38 1000VDC Photovoltaic Fuse	gPV	20
PV-FU30A10	30A 10x38 1000VDC Photovoltaic Fuse	gPV	20
PV-FU32A10	32A 10x38 1000VDC Photovoltaic Fuse	gPV	20

10X85 1500VDC PHOTOVOLTAIC FUSE

Part No.	Description	Function Class	Breaking Capacity (kA)
PV-FU2A15	2A 10x85 1500VDC Photovoltaic Fuse	gPV	20
PV-FU4A15	4A 10x85 1500VDC Photovoltaic Fuse	gPV	20
PV-FU6A15	6A 10x85 1500VDC Photovoltaic Fuse	gPV	20
PV-FU8A15	8A 10x85 1500VDC Photovoltaic Fuse	gPV	20
PV-FU10A15	10A 10x85 1500VDC Photovoltaic Fuse	gPV	20
PV-FU12A15	12A 10x85 1500VDC Photovoltaic Fuse	gPV	20
PV-FU16A15	16A 10x85 1500VDC Photovoltaic Fuse	gPV	20
PV-FU20A15	20A 10x85 1500VDC Photovoltaic Fuse	gPV	20
PV-FU25A15	25A 10x85 1500VDC Photovoltaic Fuse	gPV	20
PV-FU32A15	32A 10x85 1500VDC Photovoltaic Fuse	gPV	20

PHOTOVOLTAIC DC SWITCH

Each pole contact is equipped with an arc extinguishing system that can extinguish the arc immediately when the switch is closed.

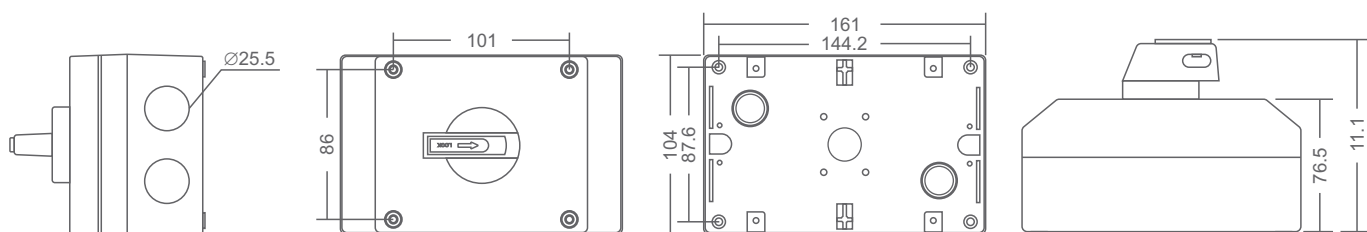





FEATURES

- Closing time : about 2ms
- The cover can only be removed in the "off" position
- IP66 rated
- IEC60947-3
- Grounding terminal
- Operation temperature : -25°C~+85°C

No.	Ue	Ie	Connection circuit
1	600V	40A	
2	800V	25A	
3	1000V	16A	
4	1200V	10A	

Part No.	Description	Box Qty
LGF40-10P2	4P 10A IP66 Photovoltaic DC Switch	1
LGF40-16P2	4P 16A IP66 Photovoltaic DC Switch	1
LGF40-25P2	4P 25A IP66 Photovoltaic DC Switch	1
LGF40-40P2	4P 40A IP66 Photovoltaic DC Switch	1

PHOTOVOLTAIC GLAND CONNECTOR



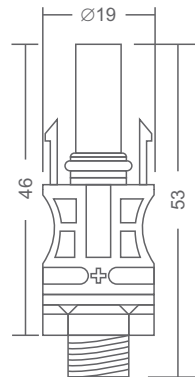
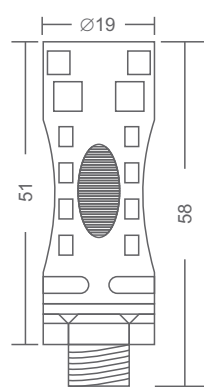


TECHNICAL DATA

- Rated voltage : 1500V DC
- Rated current : 30A
- Test voltage : 6kV(50HZ,1min)
- Ambient temperature range : -40°C...+90°C
- Upper limiting temperature : +105°C
- IP Rating : IP67
- Contact resistance of plug connector : 0.5mΩ
- Safety Class : II
- Insulation material : PC/PPO
- Corrosion test grade : IEC 60068-2-52

Part No.	Description	Box Qty
PV-SCB	1500V Solar photovoltaic Connector	1000

PHOTOVOLTAIC CABLE CONNECTOR

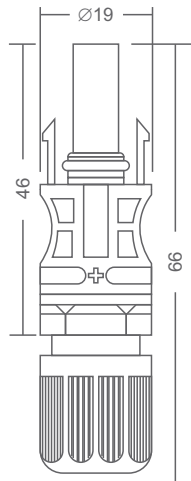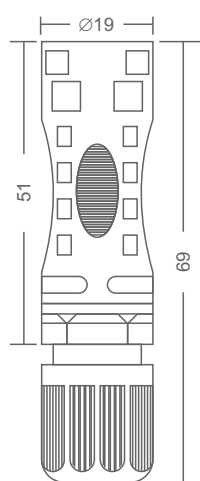


TECHNICAL DATA

- Rated voltage : 1500V DC
- Rated current : $\leq 35A$
- Test voltage : 6kV(50HZ,1min)
- Ambient temperature range : -40°C...+90°C
- Upper limiting temperature : +105°C
- IP Rating : IP67
- Contact resistance of plug connector : 0.5m Ω
- Safety Class : II
- Insulation material : PC/PPO
- Corrosion test grade : IEC 60068-2-52

Part No.	Description	Box Qty
PV-SCL	1500V Solar photovoltaic Connector	500

FUSE CONNECTOR

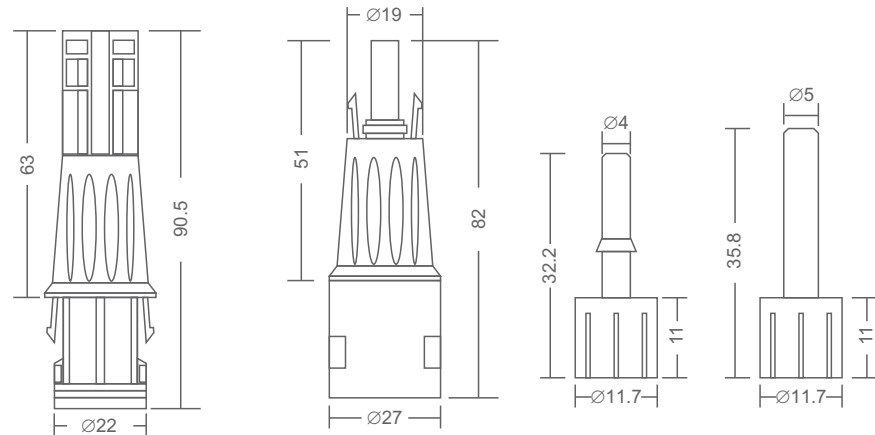

TECHNICAL DATA

- Rated voltage : 1500V DC
- Suitable fuse : $\leq 30A$, 10X85 Fuse
- Ambient temperature range : $-40^{\circ}C...+85^{\circ}C$
- IP Rating : IP67
- Contact material : Tin plated copper
- Insulation material : PPO
- Corrosion test Grade : IEC 62852



Part No.	Description	Box Qty
PV-FC1500	1500V fuse connector without fuse	500

TYPE -T BRANCH CONNECTOR



TECHNICAL DATA

- Insulation Material : PPO
- Contact Material : Copper,Tin plated
- Suitable Current : 30A
- Rated Voltage : 1000V
- Test Voltage : 6KV
- Contact Resistance : <0.5mΩ
- IP Rating : IP67
- Ambient Temperature Range : -40°C~+85°C
- Pin Dimensions : $\phi 4\text{mm}$

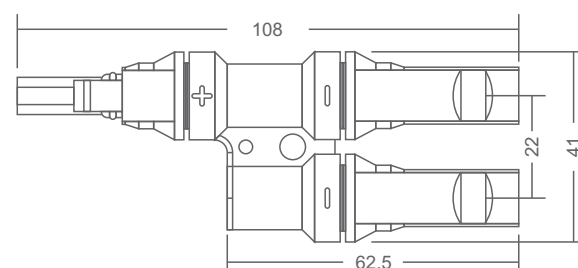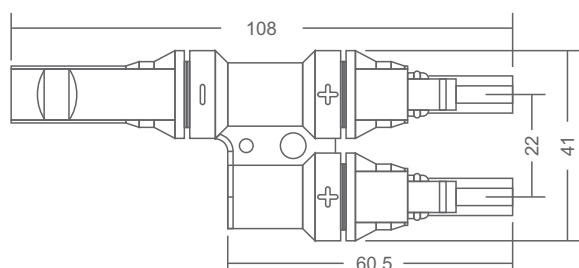

Part No.	Description	Box Qty
PV-BCT2	1000V Type-T Branch Connector, Two branches	200



TYPE -T BRANCH CONNECTOR



TECHNICAL DATA

- Insulation Material : PPO
- Contact Material : Copper,Tin plated
- Suitable Current : 30A
- Rated Voltage : 1000V
- Test Voltage : 6KV
- Contact Resistance : <0.5mΩ
- IP Rating : IP67
- Ambient Temperature Range : -40°C~+85°C
- Safety Class : II
- Pin Dimensions : $\phi 4\text{mm}$

Part No.	Description	Box Qty
PV-BCT3	1000V Type-T Branch Connector,Three branches	150

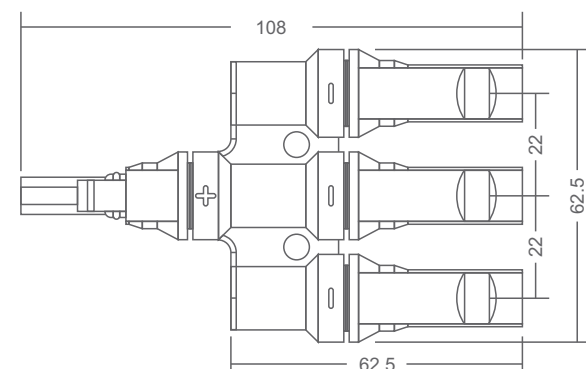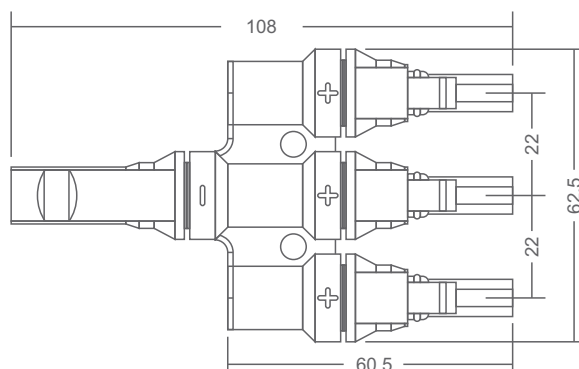



TYPE -T BRANCH CONNECTOR




TECHNICAL DATA

- Insulation Material : PPO
- Contact Material : Copper,Tin plated
- Suitable Current : 30A
- Rated Voltage : 1000V
- Test Voltage : 6KV
- Contact Resistance : <0.5mΩ
- IP Rating : IP67
- Ambient Temperature Range : -40°C~+85°C
- Safety Class : II
- Pin Dimensions : $\phi 4\text{mm}$

Part No.	Description	Box Qty
PV-BCT4	1000V Type-T Branch Connector,Four branches	100

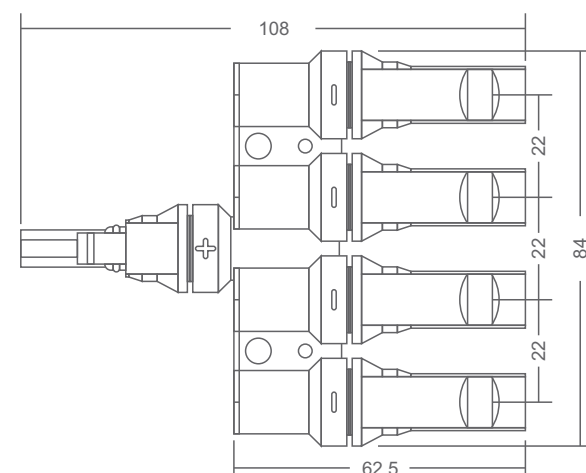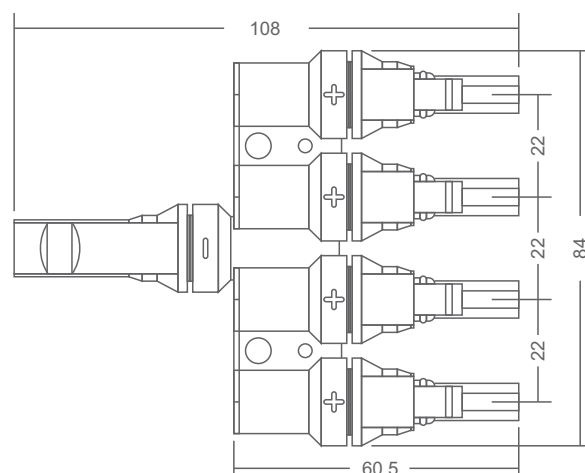

TYPE-Y PHOTOVOLTAIC BRANCH CONNECTOR

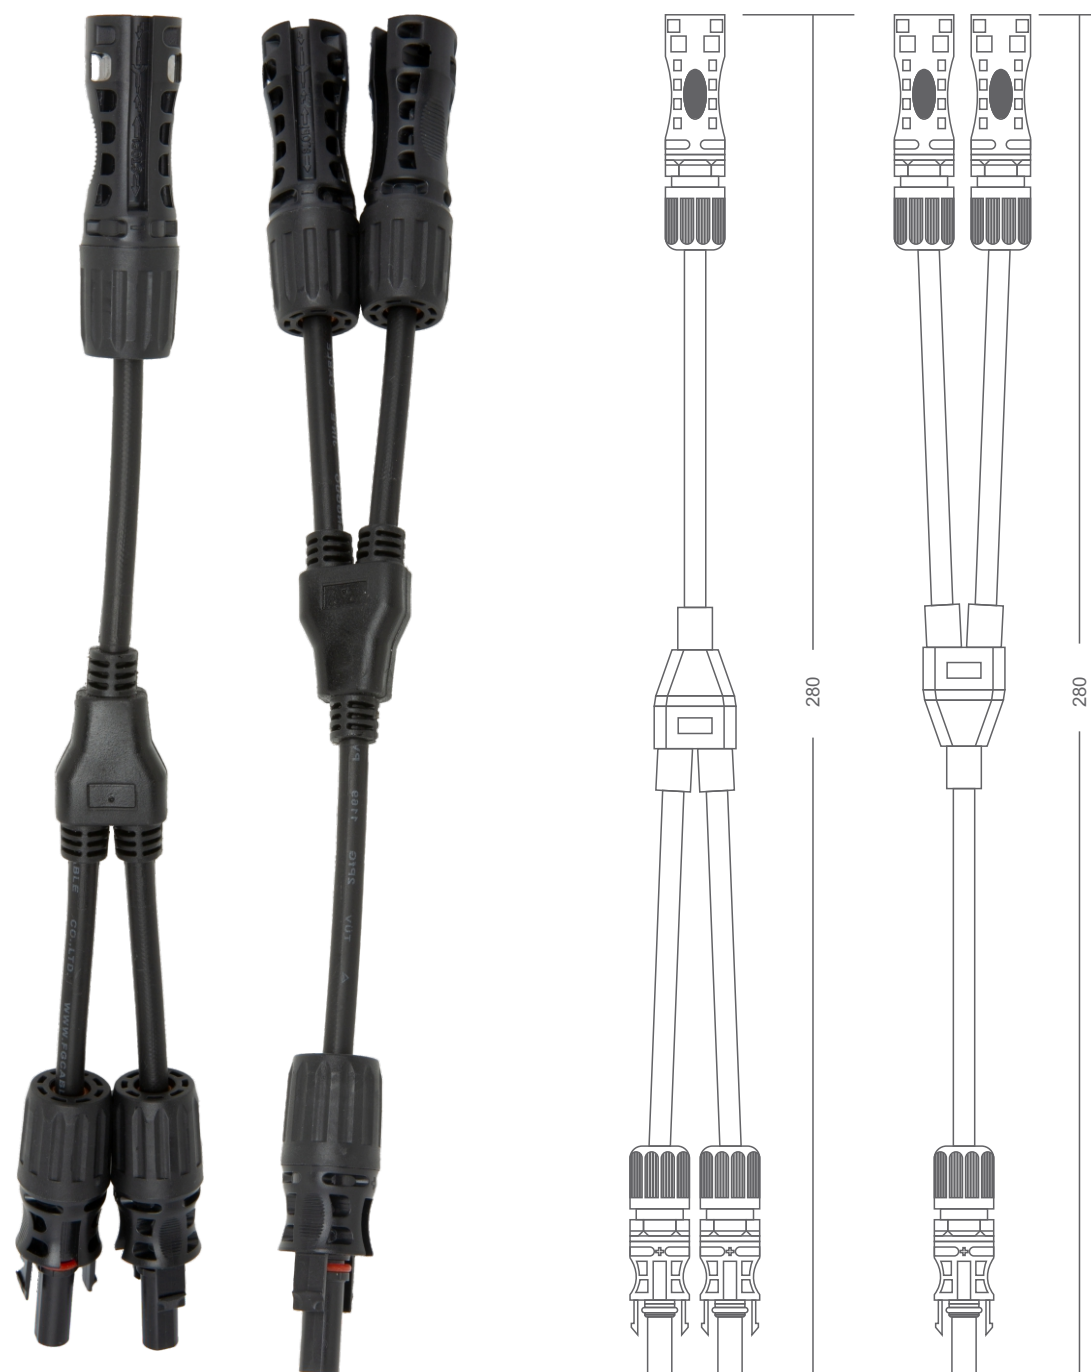


TECHNICAL DATA

- Connector system : $\phi 4\text{mm}$
- Rated voltage : 1500VDC
- Rated current : 30A
- Test voltage : 6kV(50HZ,1min)
- Ambient temperature range : $-40^{\circ}\text{C} \dots +90^{\circ}\text{C}$
- Upper limiting temperature : $+105^{\circ}\text{C}$
- IP Rating : IP67
- Contact resistance of plug connector : $0.5\text{m}\Omega$
- Safety Class : II
- Insulation material : PC/PA

- Corrosion test grade : IEC 60068-2-52

Part No.	Description	Box Qty
PV-BCY2	1500VDC Type-Y Branch Connector,Two Branches	100

TYPE-Y PHOTOVOLTAIC BRANCH CONNECTOR

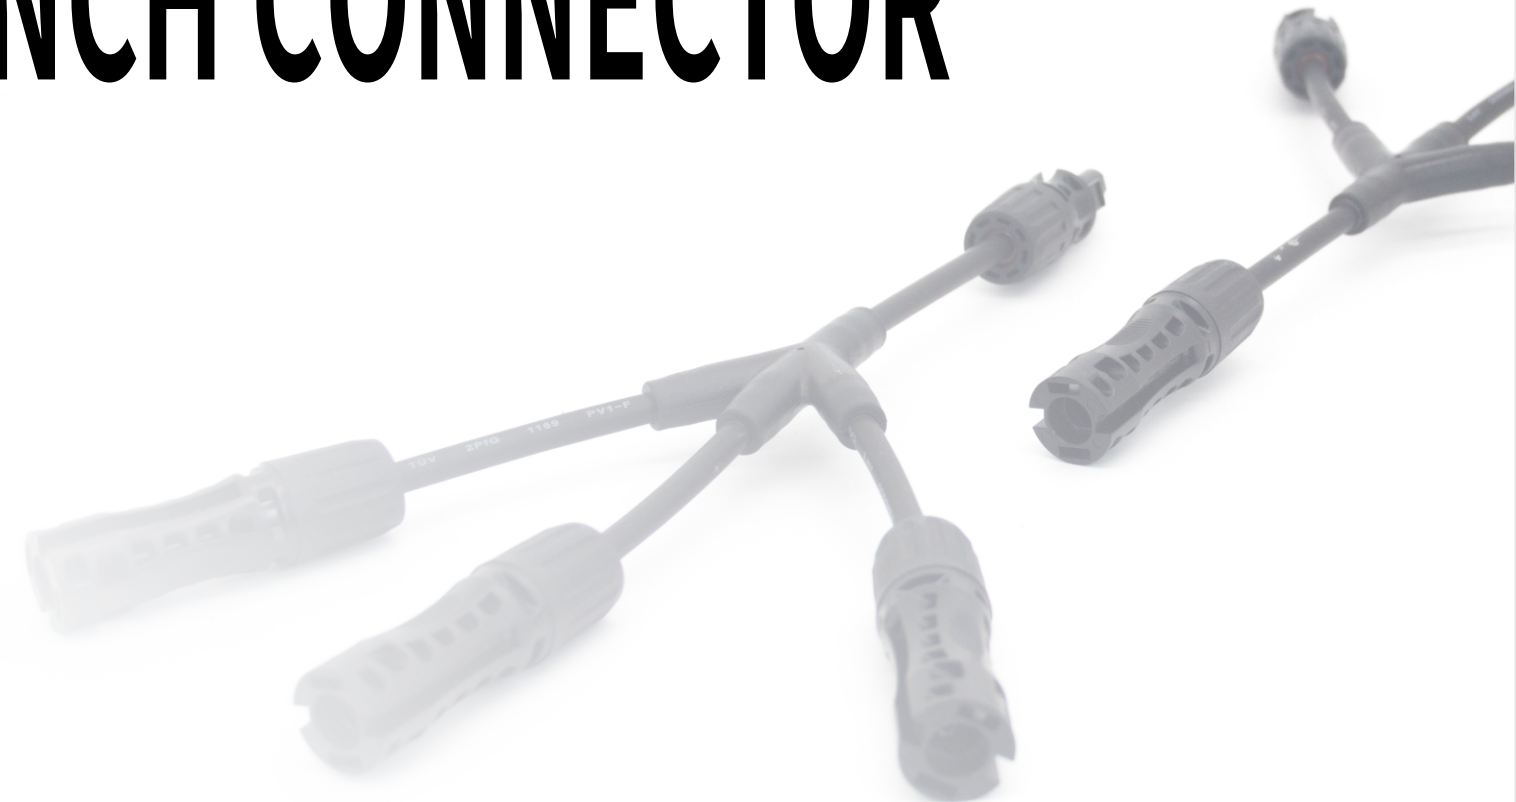


TECHNICAL DATA

- Connector system : $\phi 4\text{mm}$
- Rated voltage : 1500VDC
- Rated current : 30A
- Test voltage : 6kV(50HZ,1min)
- Ambient temperature range : $-40^{\circ}\text{C} \dots +90^{\circ}\text{C}$
- Upper limiting temperature : $+105^{\circ}\text{C}$
- IP Rating : IP67
- Contact resistance of plug connector : $0.5\text{m}\Omega$
- Safety Class : II
- Insulation material : PC/PA

- Corrosion test grade : IEC 60068-2-52

Part No.	Description	Box Qty
PV-BCY3	1500VDC Type-Y Branch Connector,Three Branches	50

TYPE-Y PHOTOVOLTAIC BRANCH CONNECTOR

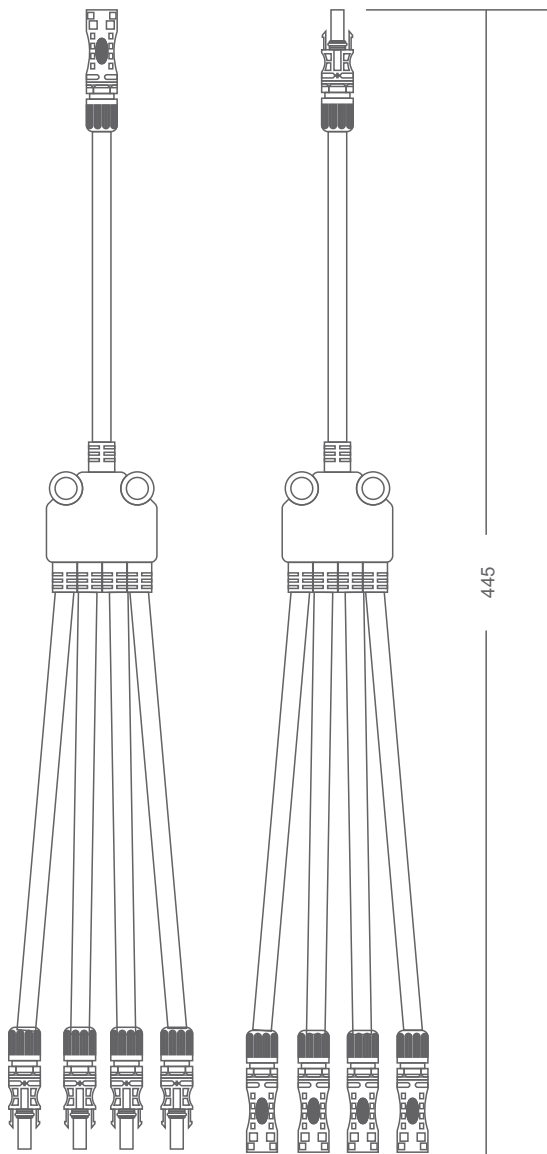


TECHNICAL DATA

- Connector system: $\phi 4\text{mm}$
- Rated voltage: 1500VDC
- Rated current: 30A
- Test voltage: 6kV(50HZ, 1min)
- Ambient temperature range: $-40^{\circ}\text{C} \dots +90^{\circ}\text{C}$
- Upper limiting temperature: $+105^{\circ}\text{C}$
- IP Rating: IP67
- Contact resistance of plug connector: $0.5\text{m}\Omega$
- Safety Class: II
- Insulation material: PC/PA

- Corrosion test grade: IEC 60068-2-52

Part No.	Description	Box Qty
PV-BCY4	1500VDC Type-Y Branch Connector, Four Branches	40

SOLAR DC CONNECTOR SPANNERS

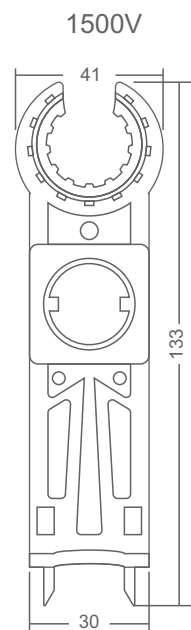

TECHNICAL DATA


- Application : 1500V solar connector
- Color : Black
- Material : ABS
- Handle : Straight

FEATURE

- Labor saving 30%
- Dual color anti slip handle and convenient operation
- Durable

Part No.	Description	Box Qty
PV-STM15	Solar DC Connector Spanners For 1500V	400

DIODE CONNECTOR

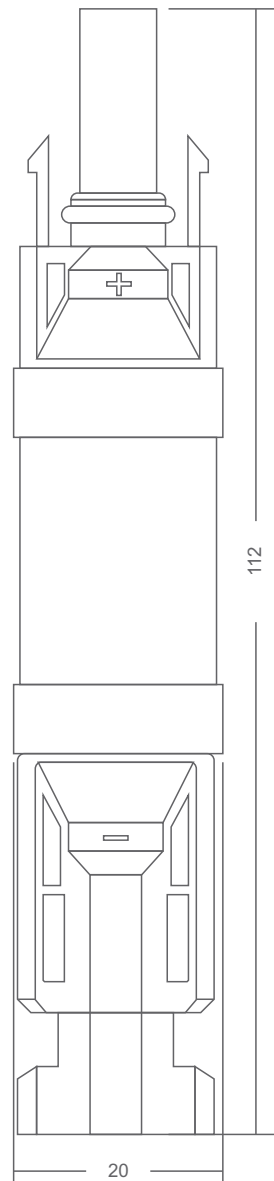




TECHNICAL DATA

- Rated Voltage : 1000V DC
- Contact materials : Tin plated copper
- Rated Current : 10A/15A/20A
- Standard : IEC 62852
- IP Rating : IP67
- Contact Resistance : $\leq 0.5\text{m}\Omega$
- Ambient Temperature : $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- Insulation Material : PPO

Part No.	Description	Box Qty
PV-DC10	10A 1000VDC Diode connector	500
PV-DC15	15A 1000VDC Diode connector	500
PV-DC20	20A 1000VDC Diode connector	500


HIGH SPEED FUSE

Designed for semiconductor protection requirements, and meets the requirements of road vehicles. Features in Compact, Low I²t, HRC. Used for short-circuit protection of EV HV electrical systems such as power battery systems, drive power systems, power conversion systems and charging equipment; it can also be used for short-circuit protection of traditional semiconductor devices.

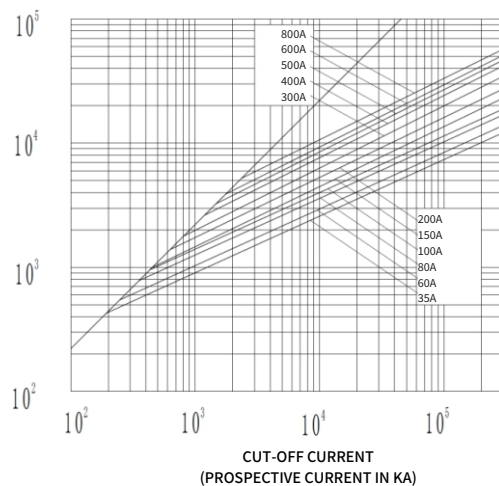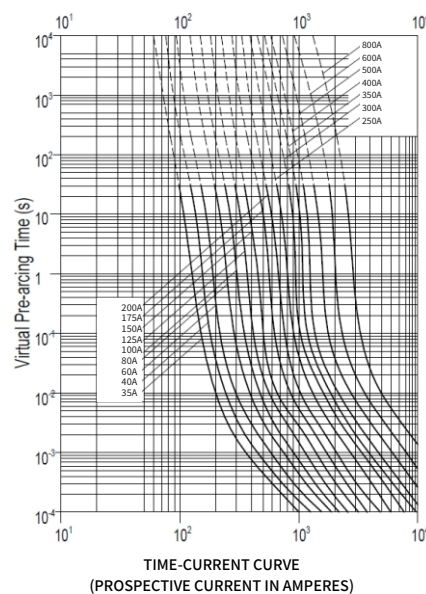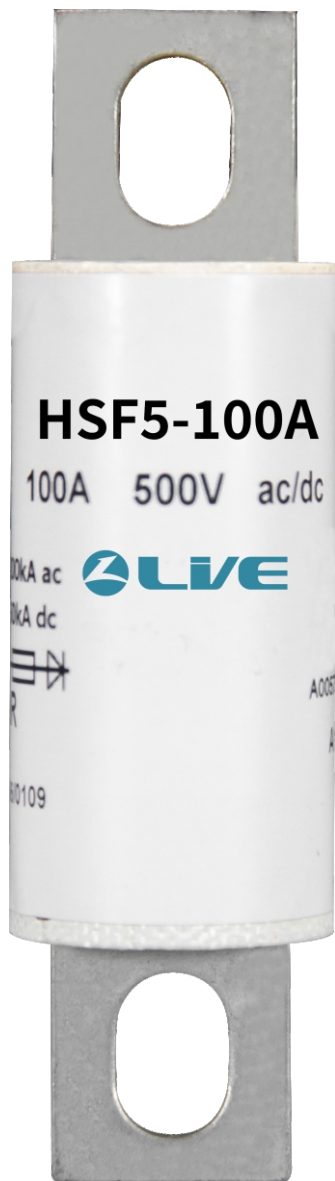

AC/DC500V HIGH SPEED FUSES TECHNICAL DATA

- Rated Voltage: AC/DC500V
- Rated Current: 35A ~ 800A
- Utilization Category: aR
- Breaking Capacity: AC200kA, DC50kA


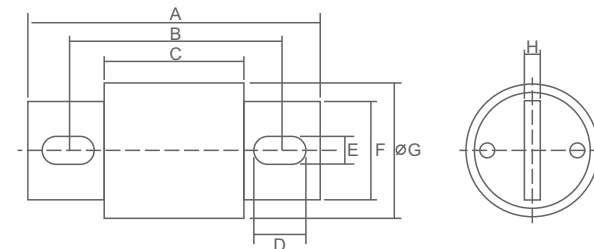


Part No.	A	B	C	D	E	F	G	H
HSF5-35A-60A	81.01	61.16	40.31	13.13	8.69	15.8	20.52	3.18
HSF5-70A-100A	92.23	72.27	53.01	13.16	8.76	19.05	25.4	3.18
HSF5-125A-200A	92.23	71.17	53.01	11.86	8.79	25.4	30.94	4.78
HSF5-225A-400A	110.31	78.28	53.01	19.07	10.34	25.4	38.1	6.35
HSF5-450A-600A	109.91	79.93	53.01	19.86	10.36	37.97	50.8	6.35
HSF5-700A-800A	160.41	106.7	53.01	33.02	13.46	50.8	63.5	9.53

Part No.	Description	I ² t (A ² s)		Loss W
		Pre-arc	Clearing at 500V	
HSF5-35A	35A 500VAC/DC High Speed Fuses	34	150	8
HSF5-40A	40A 500VAC/DC High Speed Fuses	76	320	7.5
HSF5-50A	50A 500VAC/DC High Speed Fuses	135	670	7.5
HSF5-60A	60A 500VAC/DC High Speed Fuses	210	900	9.9
HSF5-70A	70A 500VAC/DC High Speed Fuses	210	900	10.6
HSF5-80A	80A 500VAC/DC High Speed Fuses	305	1400	12.7
HSF5-90A	90A 500VAC/DC High Speed Fuses	360	1600	15
HSF5-100A	100A 500VAC/DC High Speed Fuses	475	2000	17
HSF5-125A	125A 500VAC/DC High Speed Fuses	800	3500	25
HSF5-150A	150A 500VAC/DC High Speed Fuses	1100	4600	30
HSF5-175A	175A 500VAC/DC High Speed Fuses	1450	6200	35
HSF5-200A	200A 500VAC/DC High Speed Fuses	1900	8500	40
HSF5-225A	225A 500VAC/DC High Speed Fuses	4600	23300	39
HSF5-250A	250A 500VAC/DC High Speed Fuses	6300	32200	41
HSF5-275A	275A 500VAC/DC High Speed Fuses	7900	40300	46
HSF5-300A	300A 500VAC/DC High Speed Fuses	9800	49800	51
HSF5-325A	325A 500VAC/DC High Speed Fuses	13700	63800	53
HSF5-350A	350A 500VAC/DC High Speed Fuses	14500	72900	58
HSF5-400A	400A 500VAC/DC High Speed Fuses	19200	96700	65
HSF5-450A	450A 500VAC/DC High Speed Fuses	24700	127000	74
HSF5-500A	500A 500VAC/DC High Speed Fuses	29200	149000	84
HSF5-600A	600A 500VAC/DC High Speed Fuses	41300	206000	108
HSF5-700A	700A 500VAC/DC High Speed Fuses	55000	298000	120
HSF5-800A	800A 500VAC/DC High Speed Fuses	76200	409000	128


HIGH SPEED FUSE

This fuse family adopts excellent anti-vibration and corrosion design that is suitable for various industries. It can be used for EV traction system, power converter, energy storage, charger and other applications as short-circuit, overload and back-up protection.

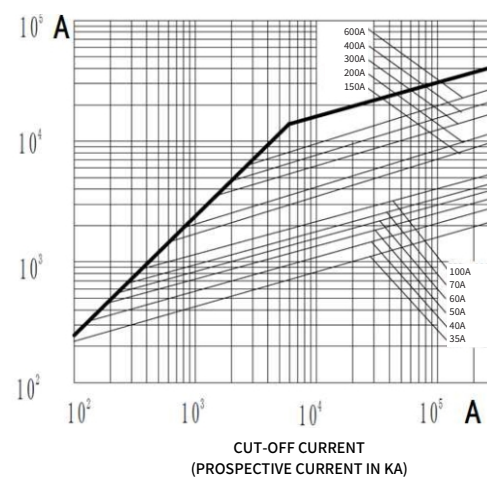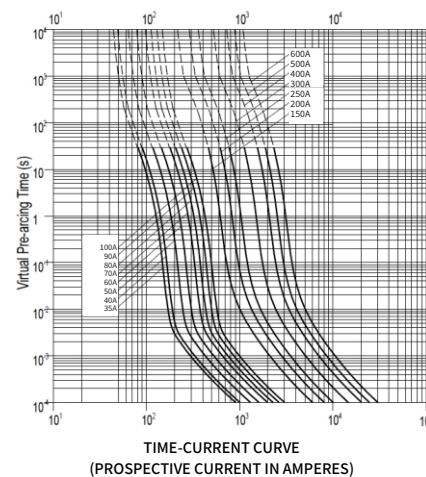

AC/DC700V HIGH SPEED FUSES TECHNICAL DATA

- Rated Voltage: AC/DC700V
- Rated Current: 35A ~ 600A
- Protection: aR
- Breaking Capacity: AC200kA, DC50kA


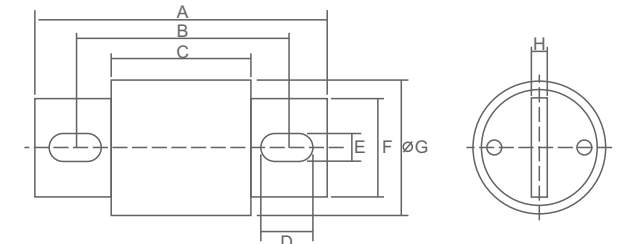


Part No.	A	B	C	D	E	F	G	H
HSF7-35A-60A	111.4	92.2	72.2	13.2	8.8	19.1	25.4	3.18
HSF7-70A-100A	111.4	92.2	72.2	11.9	8.8	25.4	31.1	4.78
HSF7125A-200A	129.5	96.7	72.2	19.1	10.3	25.4	38.1	6.35
HSF7-225A-400A	129.5	99.2	72.2	19.9	10.3	38.1	50.8	6.35
HSF7-450A-600A	180.2	125.8	72.2	33.1	13.5	50.8	63.5	9.53

Part No.	Description	I ² t (A ² s)		Loss W
		Pre-arc	Clearing at 700V	
HSF7-35A	35A 700VAC/DC High Speed Fuses	34	160	11
HSF7-40A	40A 700VAC/DC High Speed Fuses	76	320	12
HSF7-50A	50A 700VAC/DC High Speed Fuses	135	600	14
HSF7-60A	60A 700VAC/DC High Speed Fuses	210	950	15
HSF7-70A	70A 700VAC/DC High Speed Fuses	305	2000	21
HSF7-80A	80A 700VAC/DC High Speed Fuses	360	2400	24
HSF7-90A	90A 700VAC/DC High Speed Fuses	415	2700	24
HSF7-100A	100A 700VAC/DC High Speed Fuses	540	3500	25
HSF7-125A	125A 700VAC/DC High Speed Fuses	1800	7300	37
HSF7-150A	150A 700VAC/DC High Speed Fuses	2900	11700	41
HSF7-175A	175A 700VAC/DC High Speed Fuses	4200	16700	44
HSF7-200A	200A 700VAC/DC High Speed Fuses	5500	22000	47
HSF7-225A	225A 700VAC/DC High Speed Fuses	7700	31300	60
HSF7-250A	250A 700VAC/DC High Speed Fuses	10500	42500	63
HSF7-300A	300A 700VAC/DC High Speed Fuses	17600	71200	70
HSF7-350A	350A 700VAC/DC High Speed Fuses	23700	95600	80
HSF7-400A	400A 700VAC/DC High Speed Fuses	31000	125000	85
HSF7-450A	450A 700VAC/DC High Speed Fuses	36400	137000	105
HSF7-500A	500A 700VAC/DC High Speed Fuses	45200	170000	110
HSF7-600A	600A 700VAC/DC High Speed Fuses	66700	250000	138

HIGH SPEED FUSE


This fuse family adopts excellent anti-vibration and corrosion design that is suitable for various industries. It can be used for EV traction system, power converter, energy storage, charger and other applications as short-circuit, overload and back-up protection.

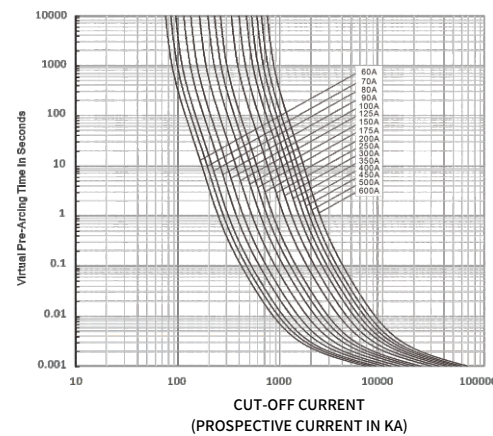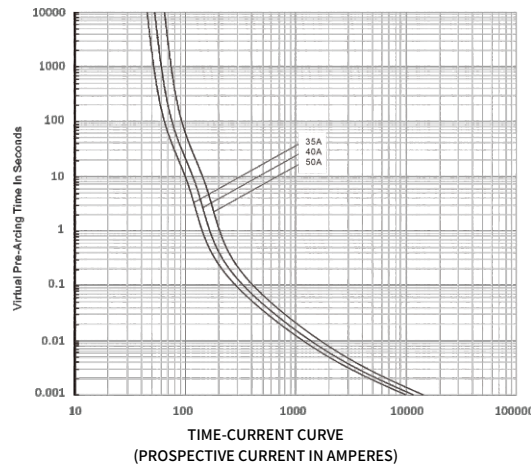

DC1000V HIGH SPEED FUSES

TECHNICAL DATA

- Rated Voltage: DC1000V
- Rated Current: 35A ~ 600A
- Protection: aR
- Breaking Capacity: 50kA

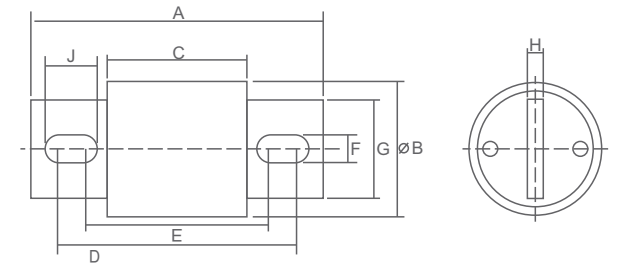

Part No.	A±1.5	B±1	C±1	D±1.5	E±1.5	F±0.5	G±1	G±0.5	J±0.5
HSF10S-35-150A	127	26	79	107.5	98.5	8.5	20	3	13
HSF10X-125-200A	136	38	79	117	98	10.5	25	6	20
HSF10-250-600A	136	51	79	117	98	10.5	40	6	20

Part No.	Description	I²t (A²s)		Loss W
		Pre-arc	Clearing at 700V	
HSF10S-35A	35	82	254	8.1
HSF10S-40A	40	128	410	8.5
HSF10S-50A	50	216	714	9.6
HSF10S-60A	60	348	1185	10.6
HSF10S-70A	70	487	1704	10.7
HSF10S-80A	80	677	2438	10.9
HSF10S-100A	100	1352	5138	16.5
HSF10S-125A	125	2048	7987	19.5
HSF10S-150A	150	2858	11431	26.3
HSF10X-125A	125	2048	8397	19.5
HSF10X-175A	175	4232	18198	28.5
HSF10X-200A	200	5576	24533	33.0
HSF10-250A	250	9032	40643	40.3
HSF10-300A	300	13317	61259	42.0
HSF10-350A	350	18432	86630	43.7
HSF10-400A	400	26542	127402	49.8
HSF10-500A	500	48672	240726	52.4
HSF10-600A	600	71442	355781	81.0

TERMS AND CONDITIONS

Live Electrical Distribution(UK)Ltd is registered at 4 Queensmead Place,Textilose Road, Manchester,M17 1PH (number 07429017).VAT Registration Number 151265629
When you (the person named on the order) place an orderwith us, we will do business with you under the followingterms.

1.VAT

The prices shown are exclusive of VAT and this will be charged at the relevant rate.

2.Payment

Where we do not offer credit facilities all our goods are on a payment-with-order basis. If credit facilities are offered payment shall be received within 30 days from date of invoice unless specified in writing. Payments shall not be withheld due to unrelated claims made by the purchaser against the seller. Late payment charges of 2% per month on any outstanding invoice will be levied on overdue payments.

3.Sending you the goods

We will normally ship you your goods on the same workitng day, as long as we receive your order before 2pm.The goods become your property as soon as we receive payme Delivery We will deliver your order to any address in the UK. For standard delivery, we use a national carrier andin most cases you will receive your goods on the nextworking day. If you live in a remote area or the carrier findsyour address more difficult to find, your delivery may take a little longer. With some of the more remote areas sucas the Highlands of Scotland, delivery can take several days.

4.Receiving orders

We will always need an authorised signature when delivering goods to you.

5.Availability

We aim to keep enough stock so that we never run out. However, at times when there is unexpectedly high demand, we may unfortunately run out. If this happens, we may delay sending out your order for a couple of days while we get new stock. We will use the information you have given with your order to let you know about our progress. You may contact us at any time to check on the progress of your order.

6.Cancellation

If you want to cancel your order, you may do so at any time until we send it out. We normally pack and send out your order in a very short period. If you want to cancel the order, you should do so by email and we will confirm whether we have been able to do this.

7>Returns

If you wish to return non stock items a return fee of 20% will be levied against the cost of the goods when returned, no returns will be accepted without prior authorisation.

8.36-Month Guarantee

If any of the goods we supply fail to perform satisfactorily due to faulty materials or workmanship, you may contact us for a refund or to arrange repair (if we decide) at any time in the first 36 months. All we ask is that you explain what the problem is and give us details of the purchase. Some of the goods we sell carry longer manufacturers' warranties. Our guarantee is aimed at giving you extra peace of mind. It is not a substitute for the manufacturer's warranty.

9.Our mistakes

We are constantly updating our products, prices and offers. We are confident of our technology and staff but we realise that we sometimes may make mistakes. If we offer goods for sale incorrectly, we will always try to honour our offer. There may be rare circumstances where it is not possible for us to do this. In these cases, we will contact you and explain the situation. If we cannot sort out the matter fairly with you, we can refuse your order and refund any payment you may have made.

10.Unexpected circumstances

If things like strikes, wars, acts of terrorism or even small things like power cuts interfere with our business with you, we will do our best to keep things going. However, we will not be legally responsible to you for any failure which is due to these unexpected circumstances or any other situation outside our control.

Legal responsibility Nothing in these terms of business should affect your legal rights or limit our legal responsibility for death, personal injury or fraudulent misrepresentation resulting from our negligence, or any other liability which we cannot limit or exclude by law. (This includes our legal responsibility under section 2(3) of the Consumer Protection Act 1987.) We will not compensate for delivery delays or failures that are outside our control unless you have asked us for a premium delivery option. In these circumstances, we will limit what we pay you to a refund of the delivery charges you have paid. We will not be legally responsible to you for any losses which both we and you could not expect at the time you bought the goods. If you are a trade customer, we will not be legally responsible to you for any business losses.

Law These terms of business will be governed by English law. Any disputes will be dealt with by the English courts.

