www.liveelectrical.co.uk

USB SOCKET INSTALLATION INSTURCTION

This product must be installed in accordance with the latest IET Wiring Regulations and Building Regulations. Please read these instructions carefully before commencing installation. Please consult a qualified electrician if in any doubt

Introduction

The LVE USB socket with dual USB Charger allows you to quickly and safely charge two USB powered devices simultaneously. It's dual-port interface features one 5V/2.1A USB charging port, ideal for ultra-fast charging devices such as iPad (including iPad Mini) and other tablets, and one 5V/1A USB charging port for iPhone, iPod and other USB powered devices

If the current is over 2.1A or the battery is fully charged,it will trip off automatically to protect the device

Installation Instruction

1 Before commencing work, isolate the main power supply and the circuit breaker in the consumer unit

2 Pass cable through the entry holes / glands and connect as per the relevant diagram below

3 Should an Earth loop connection be required, use the earth terminal block in the back box.

4 Once work has been completed correctly, switch the power back on, and test

Technical information

1 Working voltage: 13A, 250V

2 Ambient operating temperature: 0~40℃

3 USB output: 2.1A/1A, 5V

4 Complies to BS1363 &EN60950

5 Can be installed into a standard 35mm back box

Wiring Diagram

• 1 gang

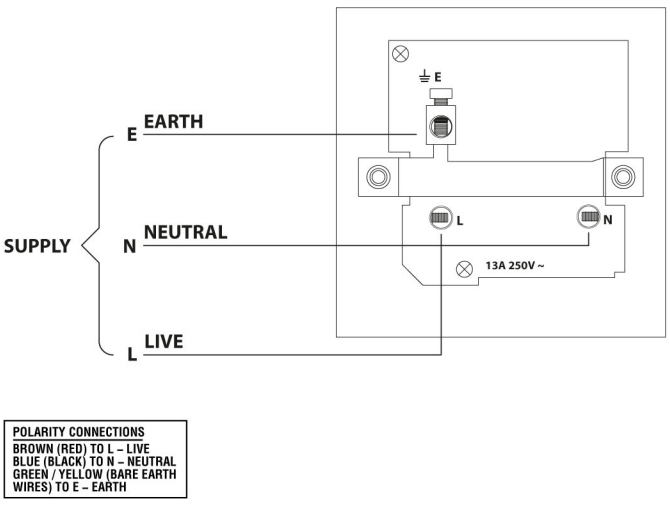

• 2 gang

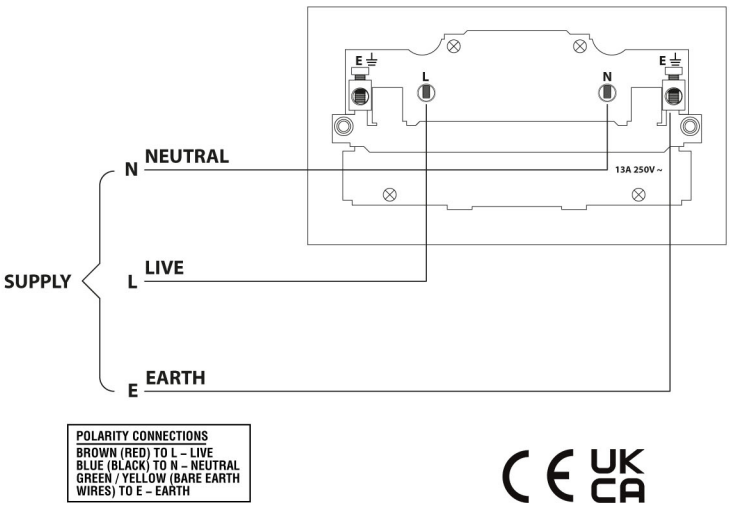

CE UK CA